



Dimensions					
SIZE OF SPIKE		HEAD		Length of taper of point	
Thickness	Length	Length	Width		
A	B	C	D	E	
in.	in.	in.	in.	in.	
Fig 1	1/4	2 - 8	5/8	3/16	3/8
	5/16	3 - 8	3/4	7/32	1/2
	3/8	3 - 12	7/8	1/4	5/8
	1/2	6 - 20	1 1/4	1 1/32	7/8
Fig 2	5/8	6 - 20	1 9/16	1 3/32	1 1/8
	1/4	3 - 8	9/16	3/16	3/8
	5/16	3 - 8	3/4	3/16	1/2
	3/8	3 - 12	1 3/16	1/4	5/8

Plain - Diamond Head

Approximate Number Per 200 lb. Keg					
LENGTH IN.	1/4	5/16	3/8	1/2	5/8
2	4500				
3	3333	2083	1439		
4	2500	1613	1105		
5	1940	1299	897		
6	1695	1087	755	435	278
7	1460	935	650	376	240
8	1282	820	573	331	213
9			512	295	190
10			462	267	171
12			387	223	144
14				192	124
16				168	109
18				150	97
20				135	84

BOAT SPIKES/DOCK SPIKES

With diamond or button* heads, square bodies, and wedge points black and/or galvanized are used for heavy duty timber construction such as docks, trestles, highway crossings, etc.

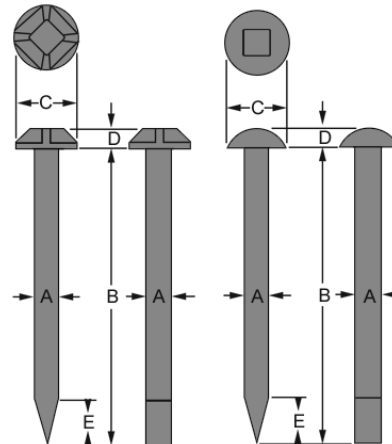


Fig. 1

Fig. 2

Galvanized - Diamond Head

Approximate Number Per 200 lb. Keg					
LENGTH IN.	1/4	5/16	3/8	1/2	5/8
2	4252				
3	3150	1968	1360		
4	2363	1524	1044		
5	1840	1228	848		
6	1602	1027	713	411	263
7	1381	884	614	355	227
8	1211	775	541	313	201
9			484	279	180
10			437	252	162
12			366	211	136
14				181	117
16				159	103
18				142	92
20				128	83